
GC Application

ZB-5HT Stability at 430°C

Column:	Zebron ZB-5HT
Phase:	5%-diphenyl-95%-dimethyl polysiloxane copolymer
Dimensions:	15 meters x 0.32 mm x 0.1 μm
Order No:	7EM-G015-02
Oven Profile:	40°C for 2min to 430°C at 20°C/min for 10min
Carrier Gas:	Constant Flow Helium, 1.9 mL/min
Injection:	On-Column 0.1 μL @ 43 °C
Detection:	Flame Ionization (FID) (430 °C)


Analyst Note: Sample was 1.5mg/mL in CS2





Products used in this Application:



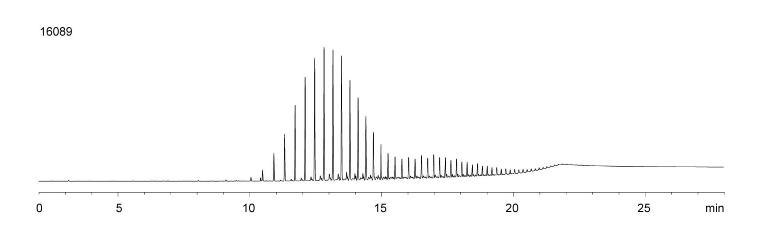

ANALYTES:

1 Pariffin Wax

©Copyright 2000-2007 Phenomenex Inc.

www.phenomenex.com Phenomenex products are available worldwide. Email us at international@phenomenex.com tel.: 02-9428-6444 email: info@phenomenex.com.au

Austria 01-319-1301 anfrage@phenomenex.com tel.: 01 247 5405 email: eireinfo@phenomenex.com

Italy 051 736176 italiainfo@phenomenex.com Canada (800) 543-3681 info@phenomenex.com New Zealand 09-4780951 info@phenomenex.co.nz Denmark 4824 8048 dkinfo@phenomenex.com

Puerto Rico (800) 541-HPLC info@phenomenex.com

France 01 30 09 21 10 franceinfo@phenomenex.com

For more information call your Phenomenex Representative at (310) 212-0555

United Kingdom 01625-501367 ukinfo@phenomenex.com

Germany 06021-58830-0 anfrage@henomenex.com

USA (310) 212-0555 info@phenomenex.com